

# faceID FT200

## Time Attendance and Access Control

Biometric Authentication: face/ EM RFID card

**MUDAH, CEPAT dan TIDAK Menyentuh sensor (face-reader)**



User Capacity : 500 face users  
 Record Capacity : 100.000 transactions  
 Communication : TCP/IP Ethernet, USB Flash  
 Access Control : Integrated controller (relay)

Lighting : 8.000 Lux  
 Dimensions : 115 (D) x 130 (W) x 150 (H) mm  
 Power : 12 VDC 1A

### GRATIS SOFTWARE



SISTIM INFORMASI KEHADIRAN  
 SIKNET STANDAR

- Modul Login
- Modul Manajemen Reader/ Handkey II
- Modul Pegawai
- Modul Jadwal Absensi/ Presensi
- Modul Proses Absensi/ Presensi
- Modul Laporan
- Database : MDB/ Ms.Access

- Modifikasi Database ke MySQL : Rp. 5.000.000,-
- Modifikasi Laporan mulai dari Rp. 2.000.000/ Laporan.

### SPESIFICATION

Processor	1 GHz High Speed Digital Processor
Power	12V DC
User Capacity	500 face
Record Capacity	100000
Security Photo	5000
Lighting	8000 Lux
Verification	Face Card
Sensor	Specialized Dual Sensor
RFID	Standard EM
Communications	TCP/IP, USB Host, Wiegand Output
Security	Relay Output
Working Distance	30cm ~ 80cm

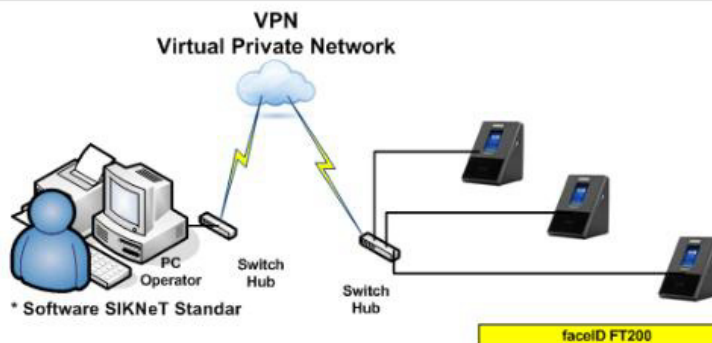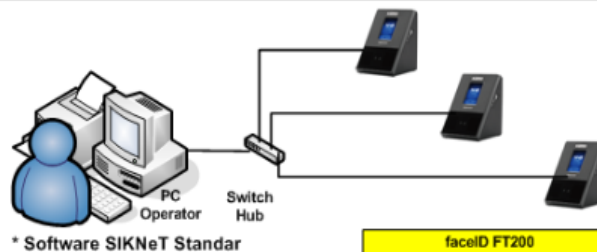

### Door-Access Control

