

# HANDKEY II

## Time Attendance and Access Control

### Mesin ABSENSI ELEKTRONIK

Identifikasi : PIN + 3 DIMENSI TANGAN  
**MUDAH, CEPAT dan HANDAL**



Power : 12 to 24 VDC 50-60 Hz, 7 watts  
 User Capacity : 512 users expandable to 32,512  
 Transaction Buffer : 5187 transactions  
 Communications : RS-232, RS-422, RS-485,  
 (optional Ethernet)

#### GRATIS SOFTWARE

SISTIM INFORMASI KEHADIRAN  
 SIKNET STANDAR


- Modul Login
- Modul Manajemen Reader/ Handkey II
- Modul Pegawai
- Modul Jadwal Absensi/ Presensi
- Modul Proses Absensi/ Presensi
- Modul Laporan
- Database : MDB/ Ms.Access

- Modifikasi Database ke MySQL : Rp. 5.000.000,-
- Modifikasi Laporan mulai dari Rp. 2.000.000/ Laporan.


#### SPESIFICATION

Size (W x H x D)  
 Weight  
 Power  
 Memory retention  
 Transaction storage  
 ID number length  
 User capacity  
 Communications  
 Door Control


8.85 in x 11.65 in x 8.55 in (22.3 cm x 29.6 cm x 21.7 cm)  
 6 lbs (2.7 kg)  
 12 to 24 VDC VAC 50-60 Hz, 7 watts  
 Up to 5 years via the standard internal lithium battery  
 5120 transactions  
 1 to 10 digits from keypad or card  
 512 users with field upgrade up to 32,512 users  
 RS-422 (4 wire), RS-232 serial printer, optinal TCP/IP-Ethernet  
 Lock Output

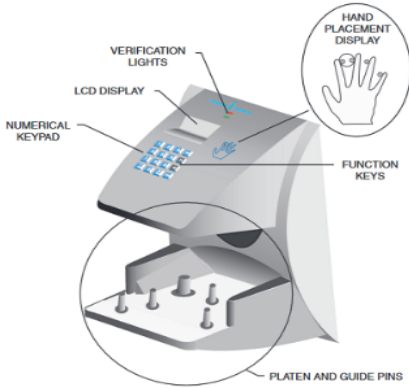

\* Software SIKNeT Standar

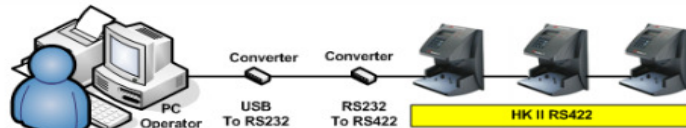


\* Software SIKNeT Standar

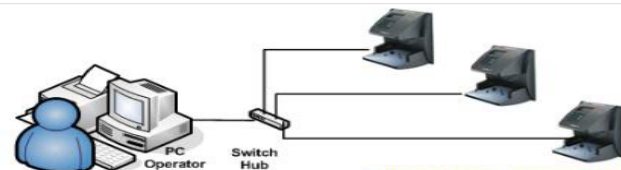

\* Software SIKNeT Standar


HK II + Module Ethernet/ eCOV

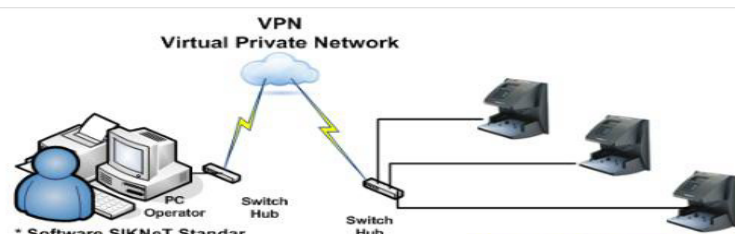

\* Software SIKNeT Standar

HK II + Module Ethernet/ eCOV

#### Door-Access Control

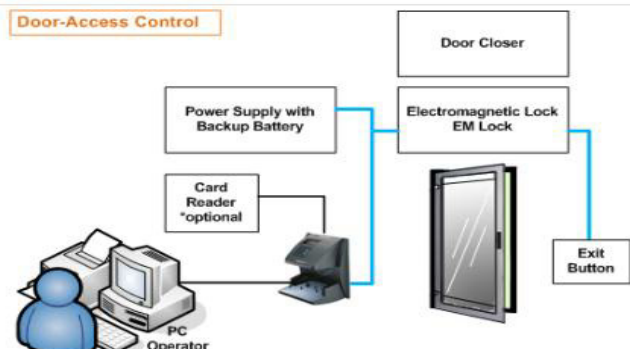

\* Software SIKNeT Standar



Lemari Handkey II