

faceID M2000

Time Attendance
and
Access Control

Multi-biometric authentication
- **face / finger / card**

MUDAH, CEPAT dan
TIDAK Menyentuh sensor (face-reader)

Power : 12 VDC
User Capacity : 2000 Face Users,
2000 Finger Users
Record Capacity : 200.000 transactions
Communications : Wi-Fi, TCP/IP Ethernet
Lighting : 20.000 Lux



GRATIS SOFTWARE



SISTIM INFORMASI KEHADIRAN
SIKNET STANDAR

- Modul Login
- Modul Manajemen Reader/ Handkey II
- Modul Pegawai
- Modul Jadwal Absensi/ Presensi
- Modul Proses Absensi/ Presensi
- Modul Laporan
- Database : MDB/ Ms.Access

- Modifikasi Database ke MySQL : Rp. 5.000.000,-
- Modifikasi Laporan mulai dari Rp. 2.000.000/ Laporan.

SPESIFICATION

Processor	1 GHz High Speed Digital Processor
Size	33cm x 23cm x 12cm (12.99in x 9.06in x 4.72in) cm
Weight	3.0kg (6.61lb.)
Power	12V DC
User Capacity	2000 face 2000 finger
Record Capacity	200000
Security Photo	200000
Lighting	20000 Lux
Verification	Face Finger Card
Sensor	Specialized Dual Sensor
RFID	Standard EM, optional Mifare
Communications	Wifi, TCP/IP, USB Host, Wiegand Output, PushToServer
Security	Relay Output, Exit Button
Working Distance	30cm ~ 80cm

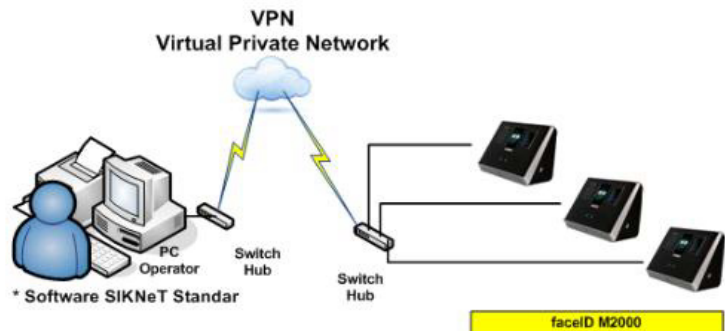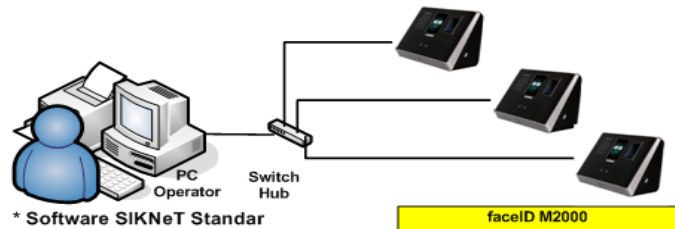

Door-Access Control

